



# MFDH

Slope roof flashing 5° - 30°

Dachdurchführung 5° - 30°

Solin de toit incliné pente 5° - 30°

Dakplaat hellend dak 5° - 30°

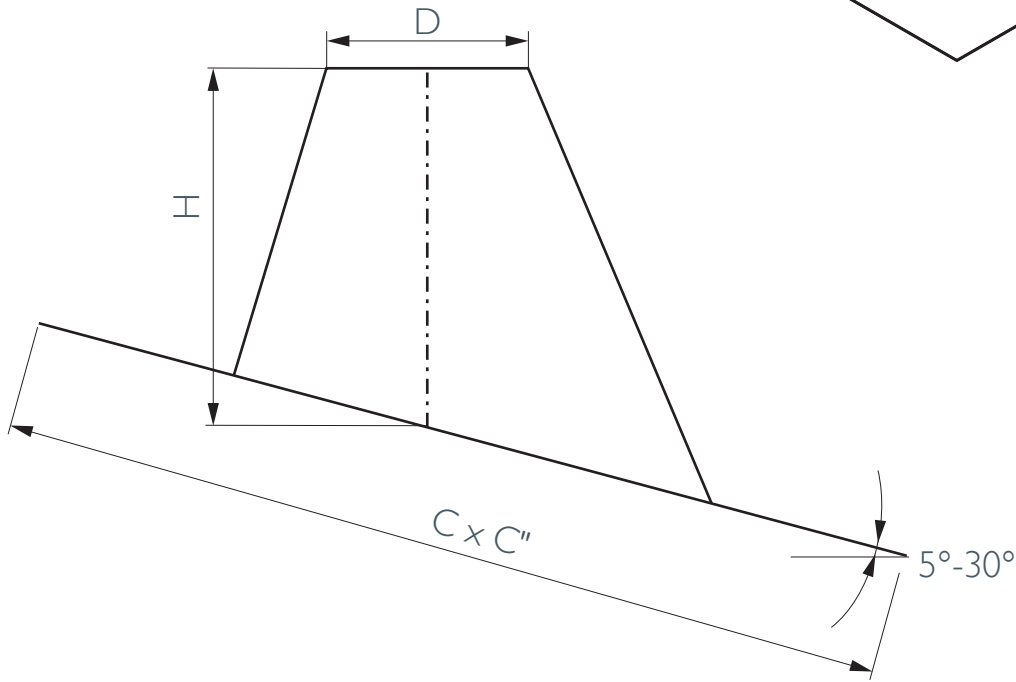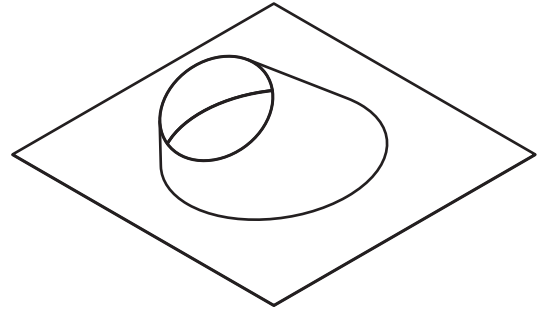

|         |        |        |        |        |        |        |        |        |        |        |        |        |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Ø       | 100    | 130    | 150    | 180    | 200    | 250    | 300    | 350    | 400    | 450    | 500    | 600    |
| D       | 155    | 185    | 205    | 235    | 255    | 305    | 355    | 405    | 455    | 530    | 580    | 680    |
| C       | 520    | 550    | 575    | 605    | 630    | 685    | 740    | 795    | 850    | 935    | 990    | 1100   |
| C"      | 500    | 530    | 550    | 580    | 600    | 655    | 705    | 760    | 810    | 890    | 940    | 1045   |
| H       | 155    | 160    | 160    | 165    | 170    | 175    | 185    | 195    | 200    | 215    | 220    | 235    |
| SAPcode | 164904 | 162212 | 162213 | 162214 | 162215 | 162216 | 162217 | 162218 | 162219 | 162220 | 162221 | 162222 |